

Energizer®

ULTIMATE LITHIUM™

Ultimate Lithium™ AAA

AAA/ FR03



World's Longest Lasting AAA Battery in High Tech Devices

Excellent Low Temp Performance

Operates from -40°F to 140°F (-40°C to 60°C).

Lightweight

Up to 33% lighter than Alkaline.

25 Year Shelf Life

100% leak proof based on standard use

Interchangeability

Interchangeable with other 1.5V batteries of the same size.

Safety

Includes a PTC (resettable over current protection) and a vent release mechanism. Compliant with all industry battery standards including ANSI, IEC, UL and UN. Certified for intrinsic safety (ATEX Directive 2014/34/EU).


Environmental

Compliant with applicable EU regulations. Non-PVC label.

AAA Device Comparison

Typical Performance at 20°C


■ AAA Lithium ■ AAA Alkaline

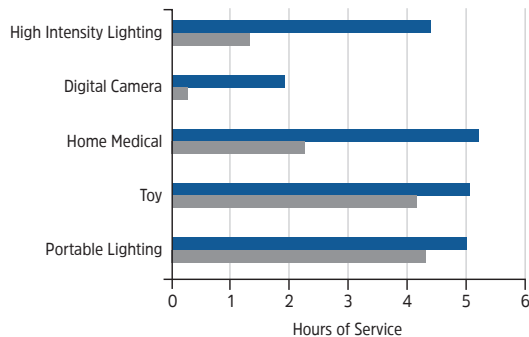

Milliamp-Hours Capacity

Constant Current Discharge to 0.8 Volts

— AAA Lithium - - - AAA Alkaline

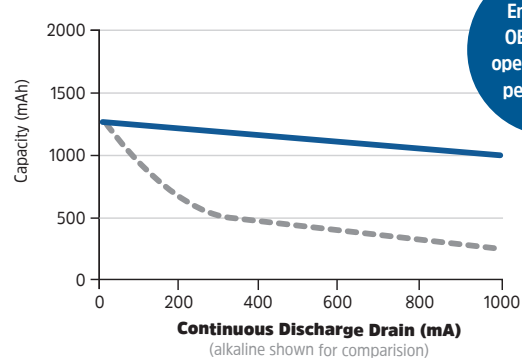


Ensure your OEM devices operate at peak performance

Temperature Effects on Capacity

Constant Current Discharge

— 25 mA - - - 250 mA ···· 1000 mA

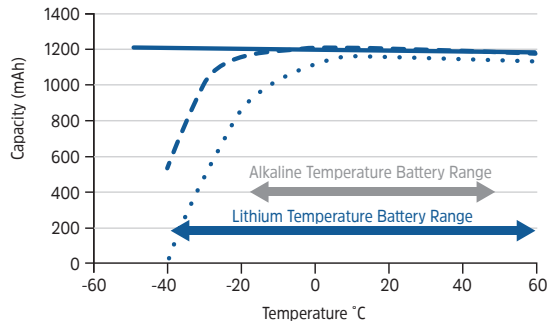

FOR MORE INFORMATION

Product sheets and technical specifications available through: www.energizer.com/OEM or directly from your account representative.

AMERICAS: Americas.OEM@energizer.com

APAC: APAC.OEM@energizer.com

EMEA: EMEA.OEM@energizer.com

Important Notice

This document contains typical information specific to products manufactured at the time of its publication. Products tested in accordance with IEC 60086-2 and ANSI C18.1M standards. © Energizer – Contents herein do not constitute a warranty.

Form No. EBC 10002-A